


Learn More




EC-1288 345mm Single-zone Induction Cooker

Design	◦ France EuroKera ceramic glass top
Features	◦ Stylish sensor touch control ◦ Cooker timer ◦ Half-Bridge Power Research Solution ◦ Combining with other cookers same depth ◦ TouchSlider Control ◦ Class 2 energy efficiency certified by Hong Kong EMSD ◦ HK ECO mark certified by The HK Certification Centre Ltd
Safety Function	◦ Safety lock ◦ 2-hours not in use auto shut-down ◦ Cookware sensor ◦ Overheat prevention
Specification	
Total Power Output :	2800W
Cooking Zone Max. Power Output :	2800W
Product Dimension (W x D x H) :	345 x 450 x 60mm
Cut Out Dimension (W x D) :	315 x 415mm


開孔尺寸 單位 Unit: 毫米 mm

型號	A	B
EC-7122IR	275	495
EC-7128IC	275	495
EC-7238IC	275	495
EC-7288RC	275	495
EC-1288	315	415
EC-2368IC	280	490



(Note: Height should be more than 100mm)

Cut out dimensions(unit/mm)(W) 345 x (D) 450 x (H) 60

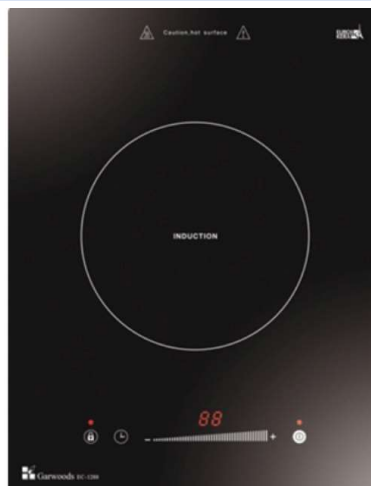


EC-1288 345 毫米單頭電磁爐

設計	• 法國 EuroKera 優質耐熱陶瓷玻璃面板	
特點	• 輕觸式感應操控	• touchSlider 輕觸滑動操控
	• 預校時間功能	• 適用於拼湊任何相同深度尺寸爐具
	• 獲取香港機電工程署頒發認可「2級」能源標籤	• 獲取香港認證中心頒發認可「香港綠色標誌」
	• Half-Bridge Power Research Solution (半橋火力精研方案)	
安全功能	• 安全鎖	• 2小時靜止操作
	• 鍋具檢知功能 (電磁烹煮區)	• 過熱保護裝置 (電磁烹煮區)
	• 餘溫警告提示 (電陶烹煮區)	• 自動調溫功能 (電陶烹煮區)
技術資料		
總火力輸出：	2800 瓦	
煮食區最高火力輸出：	2800 瓦	
產品尺寸(闊 x 深 x 高)：	345 x 450 x 60 毫米	
開孔尺寸(闊 x 深)：	315 x 415 毫米	

開孔尺寸 單位 Unit: 毫米 mm

型號	A	B
EC-7122IR	275	495
EC-7128IC	275	495
EC-7238IC	275	495
EC-7288RC	275	495
EC-1288	315	415
EC-2368IC	280	490



(注意：高度距離枱面需超過 100mm)。

開孔尺寸(單位/mm)：(闊) 570 x (深) 340 x (高) 100